

FEATURES

- Selection of 4, 6, 8, 10, 12, 14, 16 & 18 outlet ports

APPLICATION

- Distribution applications in Skids

Direct / Remote Mounting



STANDARD SPECIFICATIONS

No. of ports	:	8 ports
Wetted parts	:	AISI 316 SS
Instrument connection	:	1/2" NPT (F)
Stem packing	:	PTFE
Process connection	:	1/2" NPT (F)
Stem	:	Conical metal tip
Max. working pressure	:	413.7 bar (6000 psi)
Max. working temperature	:	240°C
"T" bar handle	:	AISI 304 SS
Drain port	:	1/2" NPT (F), plugged

ORDERING CODES

1. NO OF PORTS

04	4 ports	06	6 ports	08	8 ports	08
10	10 ports	12	12 ports	14	14 ports	
16	16 ports	18	18 ports			

2. WETTED PARTS

MF	AISI 316 SS	MG	AISI 316L SS	MF
-----------	-------------	-----------	--------------	-----------

3. INSTRUMENT CONNECTION

02N	1/4" NPT (F)	04N	1/2" NPT (F)	02B	1/4" BSP (F)	04N
04B	1/2" BSP (F)					

4. STEM PACKING

P	PTFE	G	Grafoil	P
----------	------	----------	---------	----------

5. PROCESS CONNECTION


02N	1/4" NPT (F)	04N	1/2" NPT (F)	02B	1/4" BSP (F)	04N
04B	1/2" BSP (F)					

6. OTHER OPTIONS

XY	Circular Handle	TN	Tested to NACE standards	XL
TO	Certification for Oxygen service	TM	Material test certificate 2.2	
TH	Hydro test certificate	TC	Material test certificate 3.1	
XL	Marking by laser			

Ordering Example : M201-08-MF-04N-P-04N-XL

DIMENSIONAL DRAWING

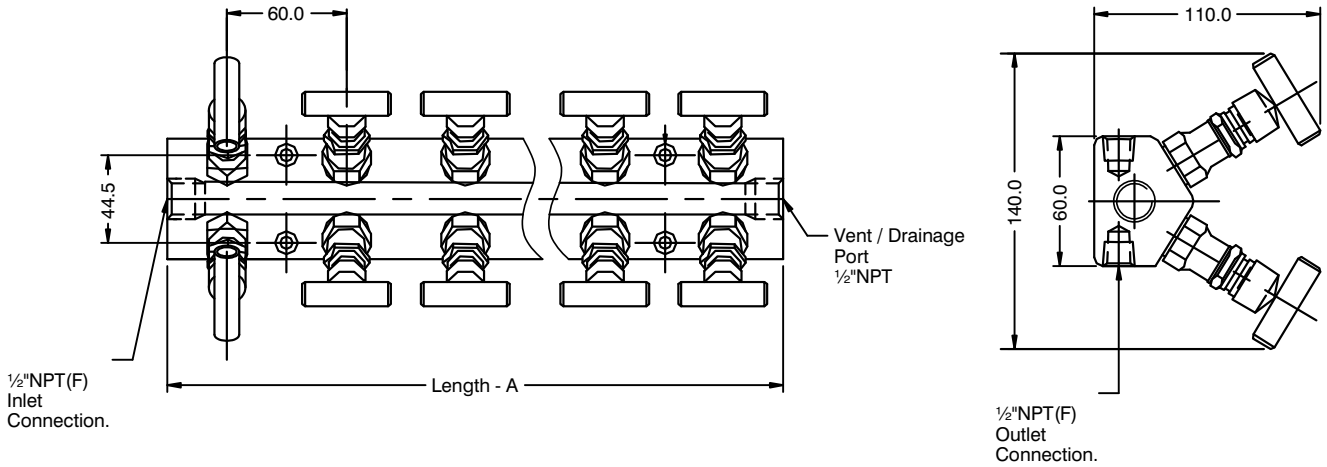

Number of Outlet Connections	Length A (in. mm)
4	5.35 (136)
6	7.72 (196)
8	10.1 (256)
10	12.4 (316)
12	14.8 (376)
14	17.2 (436)
16	19.5 (496)
18	21.9 (556)

All dimensions are in mm.

APPLICABLE ACCESSORIES

A506	Mounting bolts
A507	Ring for flanged seal
A508	Sealing gasket

NOTES:

1. Other connections are available, please contact factory for details.
2. Valve stem dust covers shall be identified with color codes according to their function as Blue = ISOLATE, Green = EQUALIZE & Red = DRAIN / VENT.